

## 4003 Fox Finger Puppet Pattern



5" Fox Finger Puppet.  
This puppet is stuffed  
for a snug fit and easy  
operation for any finger  
size.

(C) 2001 Debbie L.Pobuda

All Rights Reserved, No Part of this pattern may be reproduced electronically or in print in any form. The publisher takes no responsibility for the use of any materials or methods in this pattern. Results may vary. This is an original copyrighted design and for personal use only. Not to be manufactured for resale.

4003 Fox Finger Puppet Pattern  
(May 30, 2001)  
Published by  
Debbie Pobuda  
319 White Road  
Bowdoinham, Maine 04008

<http://www.puppetpatterns.com>  
e-mail [puppets@puppetpatterns.com](mailto:puppets@puppetpatterns.com)

<http://www.puppetsforministry.com>  
e-mail [Debbie@puppetsforministry.com](mailto:Debbie@puppetsforministry.com)

### FABRIC AND NOTIONS

**Body** 1/4 yd. of Rust colored fabric (or scrap)

**Body** 1/4 yd of White fabric (or scrap)

**Rust fake fur**- scrap of fake fur

**Eyes, Nose and Whiskers**

1 skein of black embroidery floss

1 lb. bag of polyester fiberfill

(I recommend using Polyfil(R) brand fiberfill)

scissors, pins, thread to match body fabric.

### CUTTING INSTRUCTIONS

Rust Colored Fabric:

Cut 1 of Body Back on Fold

Cut 2 of Ears

Cut 1 of upper head

White Fabric:

Cut 1 of Body Front on fold

Cut 2 of Ears

Cut 2 of Lower Jaw

Tail : Rust Colored fake fur

Cut 1 on fold

Note: Our larger patterns have completely illustrated cutting layouts.


### GENERAL SEWING INSTRUCTIONS

use 1/4" seam for all seams.


## 4003 Fox Finger Puppet 4003

USE 1/4" Seams


1. With right sides together sew center front seam of lower jaw.




2. With right sides together sew notched edge of lower jaw to notched edges of upper head.




3a With right sides together sew one white ear to one rust ear. Repeat with other ear.  
3b Turn ears right side out and fold along fold line, matching white to white.




3c With white sides matching front of face, Baste ears to curved edge of upper head between dots.




4. With right sides together sew front head to front of body along neck edge.

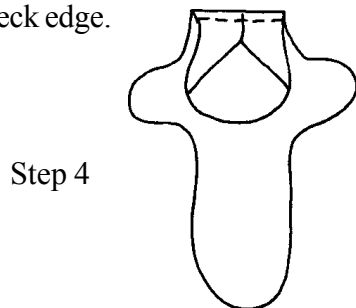


5. With right sides together stitch front to back around outside edges of body and arms leaving open between dots at bottom edge for stuffing.




6. Turn right side out. Stuff head and arms firmly till body is half full. stitch bottom opening closed.



7. Push unstuffed lower body to inside of body and wiggle fingers to center it in the middle of the stuffing.




8. Embroider triangle nose, circle eyes and 2 or 3 whiskers on each side of nose. To make whiskers pull thread behind nose and leave about 1/2" hanging out at side of nose then stitch back over nose and out through the other side of nose then leave about 1/2" of string hanging and snip thread. Repeat this to make one or two more whiskers on each side of head.

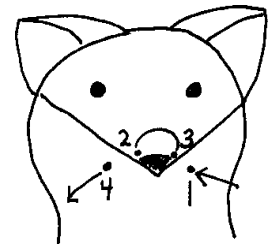

Whiskers:

Insert needle at 1, go out at 2 back in at 3 and out at 4.

9. Cut 1 fox tail of rust colored fake fur. With wrong sides together sew together along curved edge. Fluff fur edge so seam doesn't show. Fold tail so center of folded edge matches sewn seam. Stitch to center back lower edge of puppet.

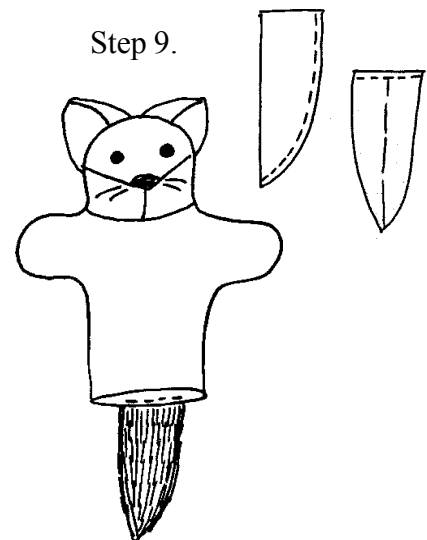

4003  
Fox Finger Puppet  
Body Front  
Cut 1 of white  
on Fold

4003  
Fox Finger Puppet  
Upper Head  
cut 1 of Rust

4003  
Fox Finger Puppet  
Body Back  
Cut 1 of rust  
on Fold

4003 Fox Finger Puppet  
Tail Cut 1 of rust fur on Fold

FOLD

FOLD

Stuff to here

FOLD

Stuff to here

Side Seam

Lower Jaw  
4003 Fox  
Finger Puppet  
Cut 2 of White

Center front seam

neck edge

Ear  
4003 Fox  
Finger Puppet  
Cut 2 White &  
Cut 2 of Rust.

FOLD

